



-0-



1%
0.35%

15
year


30
year

Module Efficiency up to

- Operating Temperature **-40°C ~ +85°C**
- Power Tolerance **0~+3%**
- Junction Box **IP68**
- NOCT **45±1°C**
- Maximum Series Fuse Rating **30A**
- Bifacial Factor **70±5%**
- Maximum System Voltage **1500V(IEC)**

Mechanical Parameters

Engineering Drawings

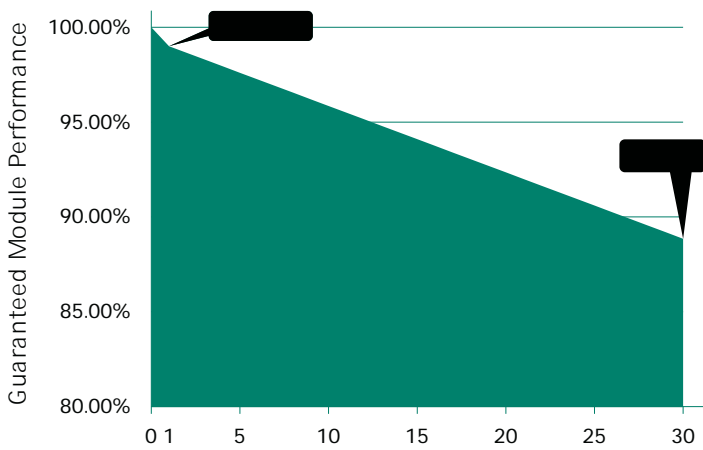

Temperature Ratings (STC)

Temperature Coefficient of Isc **+0.05%/°C**

Temperature Coefficient of Voc **-0.22%/°C**

Temperature Coefficient of Pmax **-0.26%/°C**

Mechanical Loading

Front Side Maximum Static Loading **5400Pa**

Rear Side Maximum Static Loading **5400Pa**

Hailstone Test **25 mm diameter hail at 23 m/s**

Gokin



<https://www.gokinsolar.com>
gk@gokinsolar.com