

Gokin

470-500W

Higher Generated Energy

Higher Reliability

Lower BOS

Excellent Micro-crack Resistance

High Temperature Restriction

Partial Shading Optimisation

Extraordinary Aesthetic Design


- Operating Temperature **-40°C ~ +85°C**
- Power Tolerance **0~+3%**
- Junction Box **IP68**
- NOCT
- Maximum Series Fuse Rating **25A**
- Maximum System Voltage **1500V(IEC)**

GBC

Black anodized aluminum

or Customized Length

Module Type														
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT

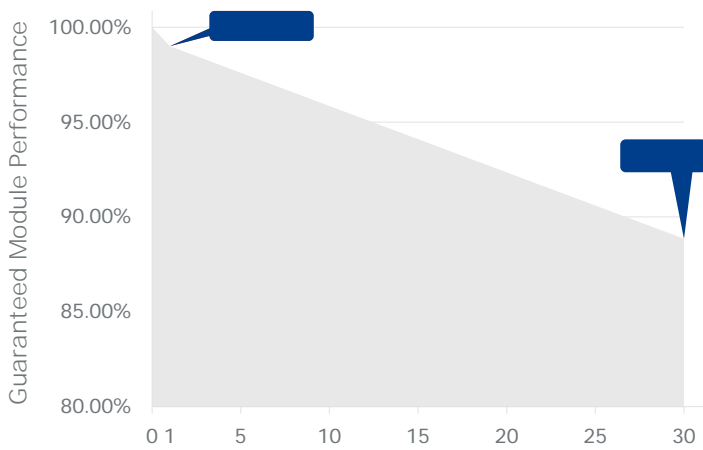

- Front Side Maximum Static Loading
- Rear Side Maximum Static Loading
- Hailstone Test