- Operating Temperature -40°C ~ +85°C
- T_{98} max 70°C
- Junction Box IP68
- NOCT 45±2°C
- Maximum Series Fuse Rating 30A
- Maximum System Voltage 1500V(IEC)

Mechanical Parameters

Cell Type	GBC
Glass	
Frame	Anodized aluminum
Output Cables	or Customized Length
Dimension	
Connector	
Packaging	
Protection Class	
Fire Rating	

Engineering Drawings

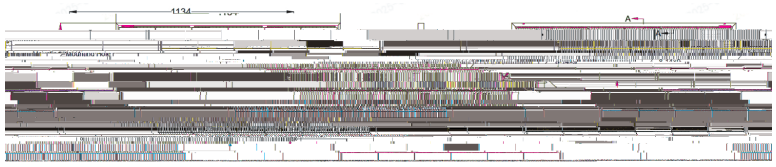

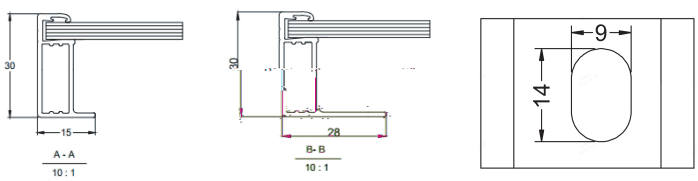

Electrical Characteristics STC Test)

Module Type			
Testing Condition	STC		
	23.3		

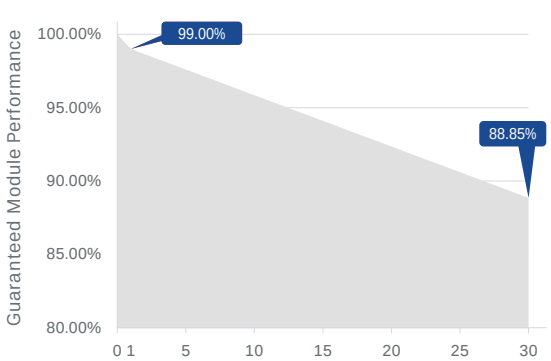

Temperature Ratings (STC)

Mechanical Test Load

Front Side Maximum Static Loading
Rear Side Maximum Static Loading
Hailstone Test

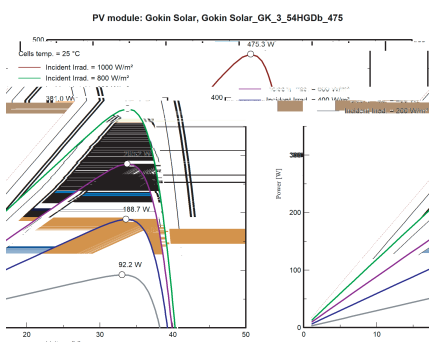

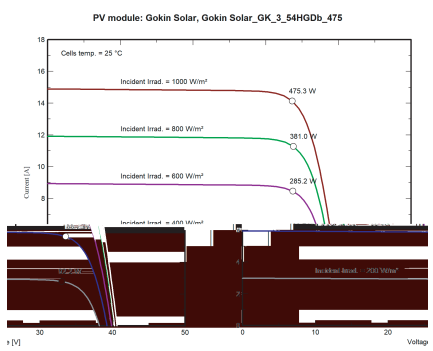

Goki

Gokin

Cable type

Connector type