

Gokin

470-500W



A

D

24.5%

1%

0.35%


€

- -40°C ~ +85°C
- Maximum Fuse Rating

Mechanical Dimensions

Engineering Drawings

2

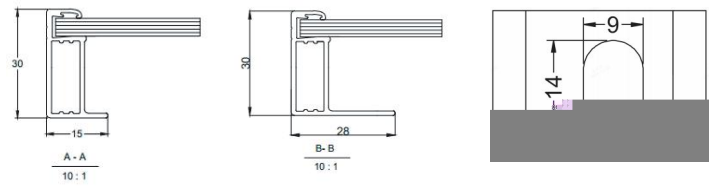

23.0

23.3

23.5

23.8

24.0

24.3

24.5