

Gokin

470-500W

Superior Temperature coefficient



A

D

- Operating Temperature **-40°C ~ +85°C**
- Power Tolerance **0~+3%**
- Junction Box **IP68**
- NOCT **45±2°C**
- Maximum Series Fuse Rating **25A**
- Maximum System Voltage **1500V(IEC)**

108 6×18

TüV 1×4mm²

24.8kg (54.67lbs)


1800×1134×30mm

MC4 Compatible/MC4-Evo2

37 pcs per pallet
222 pcs per 20' GP 888 pcs per 40' HC

Class II

IEC Class C

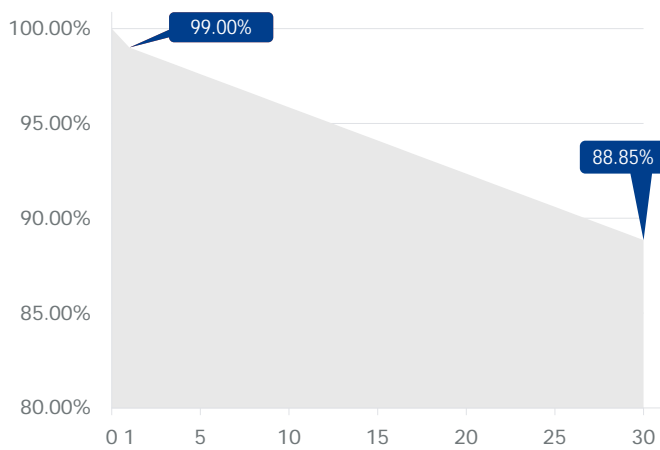

Temperature Coefficient of Isc +0.05%/

Temperature Coefficient of Voc -0.22%/

Temperature Coefficient of Pmax -0.26%/

5400Pa

2400Pa

25 mm diameter hail at 23 m/s